



Sagami , Elevating Elegant Living


Light and shadow flow together, revealing a panoramic view of seasonal beauty. Art is embedded in every detail, where modern design meets timeless elegance in a quiet expression of refined living.



01 V10 Standard Materials

- Ceiling:** JS2-04 (powder-coated steel car ceiling; color matches the aluminum alloy hoistway)
- Side walls:** aluminum alloy columns + aluminum alloy crossbars (color matches aluminum alloy hoistway) + glass
- Rear wall:** glass
- Control Panel:** IMC2022-LTV-10 (standard configuration)
- Floor:** PVC

02 Car Back Panel Options

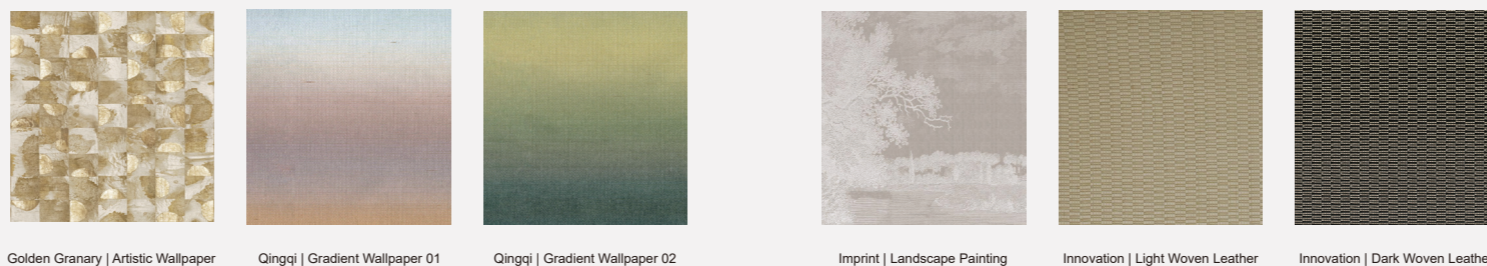


03 Call Box Options




04 Standard Control Panel Configuration




05 Door Opening Options

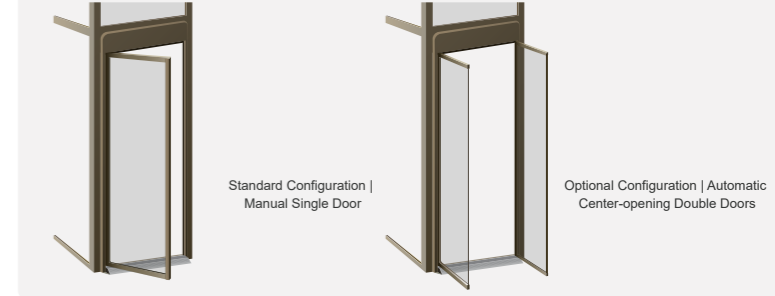

06 Car Ceiling Options

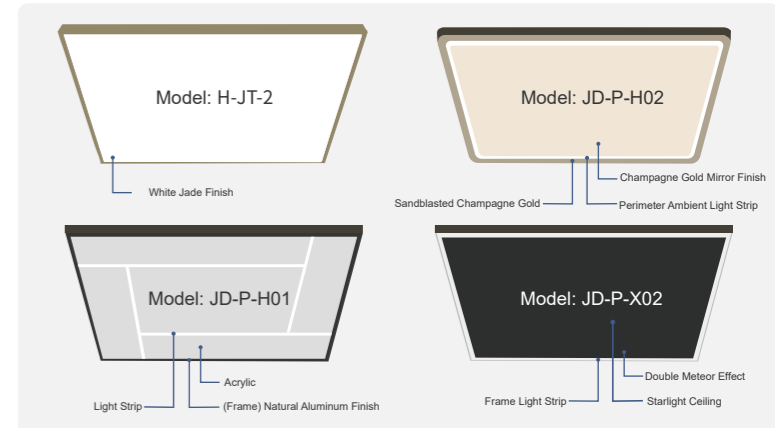

07 Car Floor Options

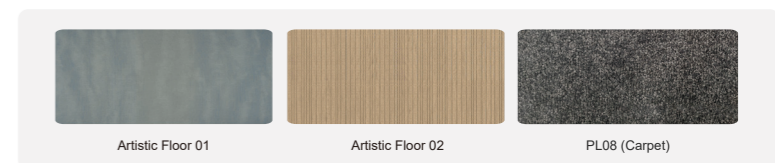


08 Frame Options



For more detailed specifications, please contact our sales representatives.




Hoistway Elevation Drawing

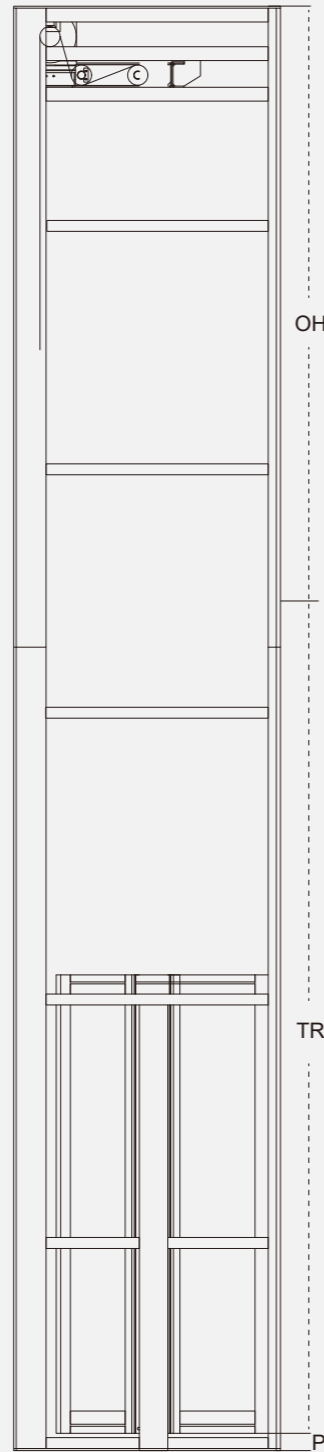

Standard Features


- Door Opening Time Setting
- Intelligent Voice Prompt
- Overload Protection
- Door Anti-pinch Protection
- Automatic Rescue in Case of Power Failure
- Collective Selective Control Operation
- Service Floor Setting
- Floor Display Setting
- Low-speed Self-rescue
- Repeated Door Closing
- Automatic Return to Base Floor
- Service Floor Setting
- Time-based Service Floor Selection
- Car Energy Saving
- Automatic Starting Torque Compensation
- Direct Stop
- Service Output Suspension
- Full-load Non-stop Operation
- Trip Count Recording
- Operating Time Recording
- Electric Brake Release
- Fault Data Recording
- Drive Comfort Adjustment
- Maintenance Forced Deceleration Stop
- In-car Call Reopen
- Forced Deceleration Switch Sticking Detection
- Hoistway Energy Saving

- Car Clear Height: CH
- Door Clear Opening Height: HH
- Overhead Height: OH
- Travel Height: TR
- Pit Depth: PD
- Door Clear Opening Width: JJ
- Car Clear Width: AA
- Car Clear Depth: BB
- Car External Width: AS
- Car External Depth: BS
- Travel Height: TR
- Car Guide Rail Spacing: BG
- Aluminum Alloy Hoistway Clear Width: AH
- Aluminum Alloy Hoistway Clear Width: BH
- Reserved Structural Width: RSW
- Reserved Structural Depth: RSD

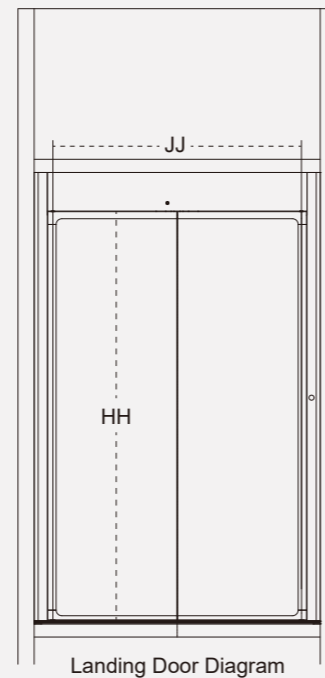


Landing Door Diagram

The traction machine is located at the top of the hoistway and is installed using a fixation method involving the counterweight guide rails and hoistway walls.
Hoistway wall structure: The hoistway wall supports concrete structures, brick-concrete structures, and steel structures.



Automatic Center-opening Double Doors



Manual Single Door



Matches the car color

Sightseeing Elevator Elevation Drawing

Zhishang Series

- Maximum Stops: 5 floors
- Maximum Travel: 12,000 mm
- Power Supply: 220 V / 50 Hz
- Speed: 0.3 m/s
- Door Configuration: Manual Single Door, Automatic Center-opening Double Doors
- Rated Load: 280, 320, 400 (kg)

Car dimensions corresponding to standard hoistway dimensions

Dimension: mm

AA	BB	AH	BH	RSW	RSD
700	700~1200	960	960~1460	990	990~1490
750		1010		1040	
800		1060		1090	
850		1110		1140	
900		1160		1190	
950		1210		1240	
1000		1260		1290	
1050		1310		1340	
1100		1360		1390	
1150		1410		1440	
1200	1460	1490			

Pit Depth (PD) (mm): 100-800 mm CH (mm): 2000, 2100, 2200 HH (mm): 1900, 2000 (standard), 2100 OH standard (mm): CH + 700; minimum: CH + 600

Note: JJ (mm): AA-38 AH (mm): AA+260 BH (mm): BB+260 RSW (mm): AA+290 RSD (mm): BB+290

Zhishang Series

YOUR DREAM HOME
Small Space, Big View



400-900-9099

400-900-9099

Joyful as Stairway, Ascending with Support

- 360° Comprehensive Safety Protection
- Comfortable, Quiet Living Experience
- 24/7 Safety Protection
- Outstanding Design

Extensive Product Portfolio Diverse Elevator Customization Solutions Compatible with All Interior Styles

This brochure is for invitation to treat only and does not constitute any commitment. The rights and obligations of both parties, as well as the final delivery standards, shall be governed by the formally executed contract and its technical annexes. Our company reserves the right to improve product technical parameters, configurations, materials, software, and exterior design. In the event of any material changes, written notice will be provided prior to contract signing, and the technical annexes shall be reconfirmed with the customer accordingly. Elevator car interior finishes, car operating panel styles, door operator systems, ceiling configurations, and other specifications may vary depending on the model, hoistway dimensions, or customer-specific requirements. The renderings in this brochure are for reference only; some configurations are optional, and final details shall be subject to the Product Specification Sheet in the sales contract. The contents of this brochure are subject to change without prior notice.